

RUNERGY

HY-DH96N11

Turbo

Monofacial

450-470W

23.5%

Max. Efficiency

N-Type

Monofacial & Dual Glass

96 Pieces

Half-Cell



Leading Technology

Based on n-type cell and 210R technology platform; Advanced design and manufacturing process; Industry leading reliability and efficiency of mass production



High Power

Bifacial higher power output, lower temperature coefficient and better low light performance; Significantly enhanced power output and lower LCOE





Long-term Reliability

Unsusceptible to LID, LeTID and lower PID degradation; 5400Pa snow load, 2400Pa wind load, and 35mm hail-resistant with 27.2m/s strike



Stringent Quality Control

Durable product structure; Stringent quality control system; Guaranteed after-sales service to ensure long-term reliability

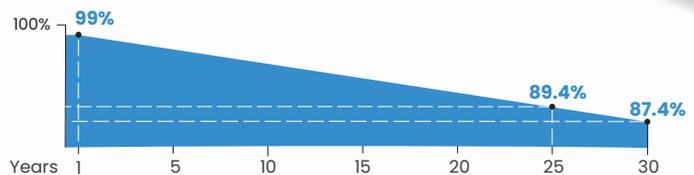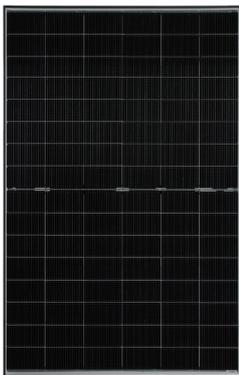

Runergy N-Type Dual Glass Product Performance Warranty

• 1st year degradation **<1%**, annual degradation **<0.4%**



12-year product warranty



30-year linear power warranty

IEC61215 / IEC61730 / UL61730 / IEC61701 / IEC62716 / IEC60068 / ISO9001 / ISO14001 / ISO45001




www.runergy.com
sales-inform@runergy.com

Unit: mm (inch)

Mechanical Parameters

Solar Cell	Mono N-Type 182*210 mm
No. of Cells	96 (6 × 16)
Dimensions	1762 × 1134 × 30mm (69.37 x 44.65 x 1.18in)
Weight	25kg (55.12lbs)
Junction Box	IP68 rated (3 bypass diodes)
Output Cable	4mm ² (IEC), 12 AWG (UL) ±1200mm (47.24in.) or customized
Connector	MC4-EVO2 or similar
Front Cover	2.0mm AR coated heat-strengthened glass
Back Cover	2.0mm heat-strengthened glass
Frame	Black-anodized aluminum
Container	36 pcs/pallet, 936 pcs/40' HQ (Global) ,756 pcs/40' HQ (US)

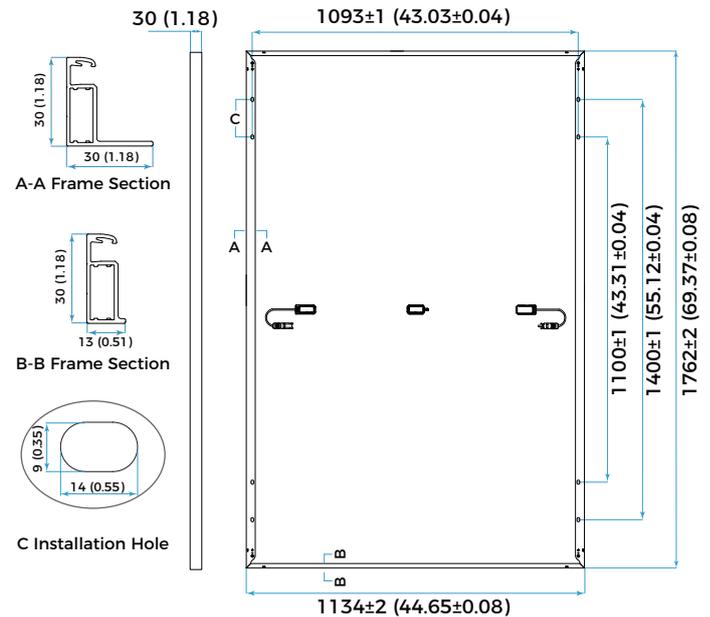

Operating Parameters

Max. System Voltage	DC 1500V (IEC/UL)
Operating Temperature	-40°C ~ +85°C (-40°F ~ +185°F)
Max. Fuse Rating	35A
Frontside Max. Loading	5400Pa (112lb/ft ²)
Backside Max. Loading	2400Pa (50lb/ft ²)
Hail Test	35mm, 27.2 m/s.
Fire Resistance	IEC Class A/ UL Type 29

Electrical Characteristics - STC

Irradiance 1000 W/m², cell temperature 25 °C, AM-1.5, Test uncertainty for Pmax: ±3%

Maximum Power at STC (Pmax/W)	470	465	460	455	450
Power Tolerance (W)			0 ~ +5		
Optimum Operating Voltage (Vmp/V)	29.96	29.83	29.70	29.57	29.44
Optimum Operating Current (Imp/A)	15.69	15.59	15.49	15.39	15.29
Open Circuit Voltage (Voc/V)	35.78	35.65	35.52	35.39	35.26
Short Circuit Current (Isc/A)	16.39	16.31	16.23	16.15	16.07
Module Efficiency	23.5%	23.2%	23.0%	22.8%	22.5%

Electrical Characteristics - NMOT

Irradiance 800 W/m², ambient temperature 20 °C, AM1.5, wind speed 1 m/s.

Maximum Power at NMOT (Pmax/W)	360.0	356.2	352.3	348.5	344.8
Optimum Operating Voltage (Vmp/V)	28.69	28.56	28.44	28.31	28.19
Optimum Operating Current (Imp/A)	12.55	12.47	12.39	12.31	12.23
Open Circuit Voltage (Voc/V)	34.26	34.13	34.01	33.89	33.76
Short Circuit Current (Isc/A)	13.21	13.15	13.08	13.02	12.95

Warranty

Product Workmanship Warranty	12 Years
Linear Power Output Warranty	30 Years
First Year Degradation	1%
Annual Power Degradation	0.4%

Temperature Characteristics

Nominal Module Operating Temperature	42 ± 2 °C
Nominal Cell Operating Temperature	45 ± 2 °C
Temperature Coefficient of Pmax	-0.29%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	0.045%/°C

