

# RUNERGY

## **TIER 1** HY-DH108N8B **410-430W**

**22.0%** Max. Efficiency    **N-Type** Bifacial & Dual Glass    **108 Pieces** Half-Cell

### **High Conversion Efficiency**

Module efficiency up to 22.0% based on N-Type wafer and advanced N-Type cell technology

### **Excellent Energy Yield**




More power output in field operation due to better thermal behaviors, weak-light performance and bifaciality

### **Outstanding Anti-degradation**

Unsusceptible to LID, LeTID and less annual degradation due to special characteristics of N-Type

### **Quality Guarantee**

High module quality ensures long-term reliability

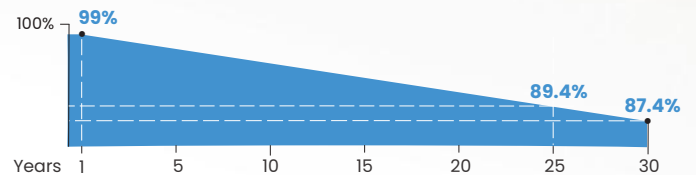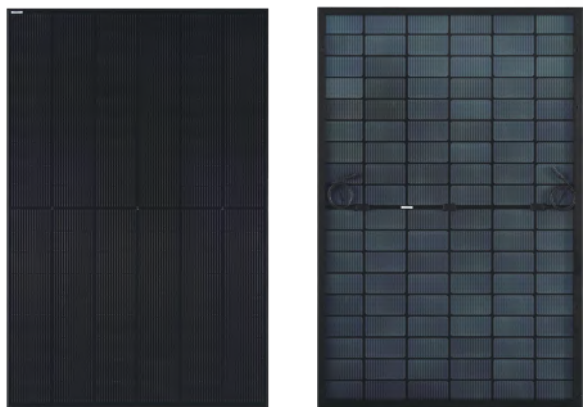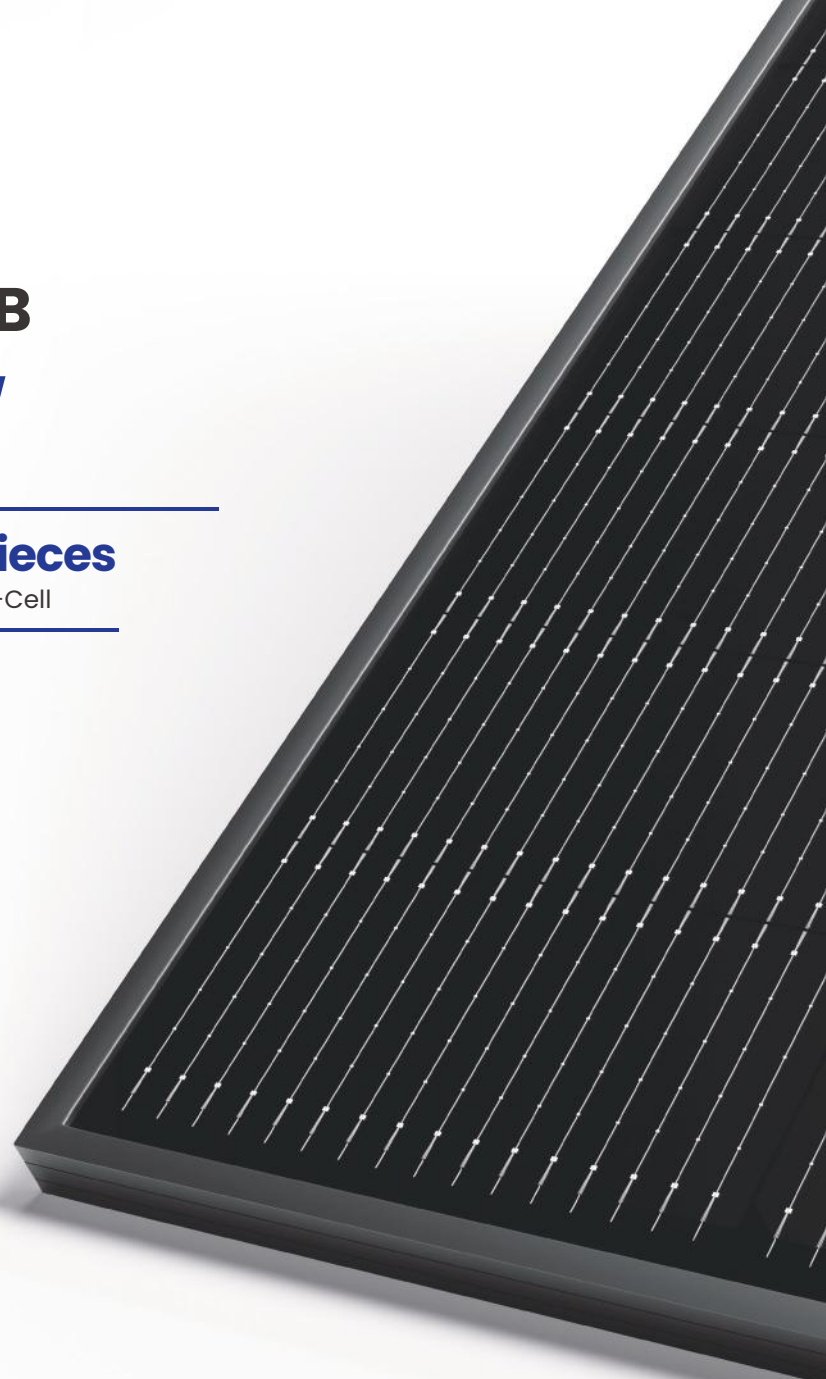

Runergy N-Type Dual Glass Product Performance Warranty

- **15 Years** warranty for materials and workmanship
- **30 Years** warranty for extra linear power output
- 1st year < **1%**, annual degradation < **0.4%**

IEC61215 / IEC61730 / UL61730 / IEC61701 / IEC62716 / IEC60068 / ISO9001 / ISO14001 / ISO45001




www.runergy.com  
sales-inform@runergy.com

## Mechanical Parameters

Solar Cell	Mono N-Type 182mm
No. of Cells	108 (6 × 18)
Dimensions	1722 × 1134 × 30mm(67.80 x 44.65 x 1.18in)
Weight	24.2kg(53.35lbs)
Junction Box	IP68 rated (3 bypass diodes)
Output Cable	4mm <sup>2</sup> (IEC), 12 AWG(UL) ±1200mm(47.24in.) or customized
Connector	RY01 or similar
Front Cover	2.0mm (0.079in.)semi-tempered AR glass
Back Cover	2.0mm (0.079in.)semi-tempered glass
Container	36 pcs/Pallet, 936 pcs/40' HQ

## Operating Parameters

Max. System Voltage	DC 1500V (IEC/UL)
Operating Temperature	-40°C ~ +85°C(-40°F ~ +185°F)
Max. Fuse Rating	30A
Frontside Max. Loading	5400Pa(112lb/ft <sup>2</sup> )
Backside Max. Loading	2400Pa(50lb/ft <sup>2</sup> )
Bifaciality	80%±10%
Fire Resistance	IEC Class A

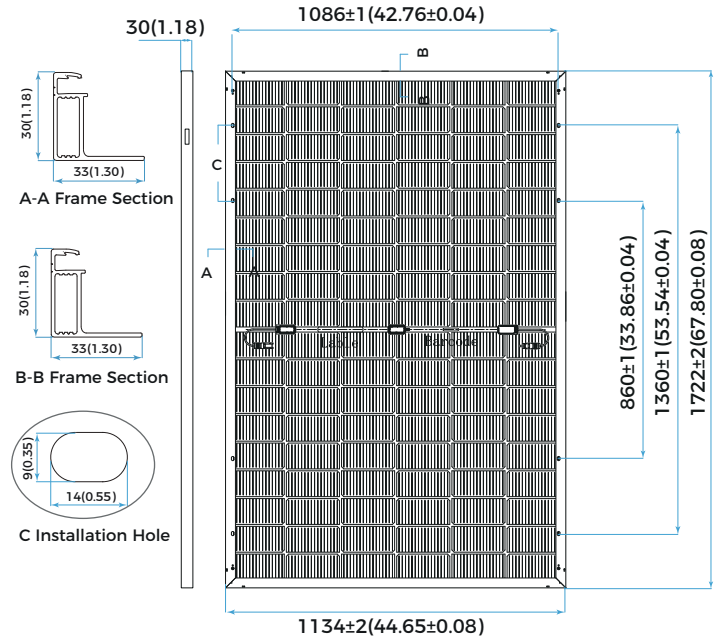

## Electrical Characteristics - STC

Irradiance 1000 W/m<sup>2</sup>, cell temperature 25 °C, AM1.5, Test uncertainty for Pmax: ±3%

	430	425	420	415	410
Maximum Power at STC (Pmax/W)	430	425	420	415	410
Power Tolerance (W)			0 ~ +5		
Optimum Operating Voltage (Vmp/V)	32.85	32.67	32.49	32.30	32.11
Optimum Operating Current (Imp/A)	13.09	13.01	12.93	12.85	12.77
Open Circuit Voltage (Voc/V)	38.78	38.59	38.40	38.20	38.00
Short Circuit Current (Isc/A)	13.72	13.64	13.56	13.48	13.40
Module Efficiency	22.0%	21.8%	21.5%	21.3%	21.0%

## Electrical Characteristics - NMOT

Irradiance 800 W/m<sup>2</sup>, ambient temperature 20 °C, AM1.5, wind speed 1 m/s.

	329.3	325.5	321.7	317.9	314.0
Maximum Power at NMOT (Pmax/W)	329.3	325.5	321.7	317.9	314.0
Optimum Operating Voltage (Vmp/V)	31.45	31.28	31.11	30.93	30.75
Optimum Operating Current (Imp/A)	10.47	10.41	10.34	10.28	10.21
Open Circuit Voltage (Voc/V)	37.13	36.95	36.77	36.58	36.39
Short Circuit Current (Isc/A)	11.06	11.00	10.93	10.87	10.80

## Rearside Power Gain (Reference to 430W Front)

	5%	15%	25%
Rearside Power Gain	5%	15%	25%
Maximum Power (Pmax/W)	452	495	538
Optimum Operating Voltage (Vmp/V)	32.85	32.95	32.95
Optimum Operating Current (Imp/A)	13.74	15.01	16.31
Open Circuit Voltage (Voc/V)	38.78	38.88	38.88
Short Circuit Current (Isc/A)	14.41	15.74	17.11
Module Efficiency	23.1%	25.3%	27.6%

## Temperature Characteristics

Nominal Module Operating Temperature	42 ± 2 °C
Nominal Cell Operating Temperature	45 ± 2 °C
Temperature Coefficient of Pmax	-0.29%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	0.045%/°C

