


## HY-WH108P8B

# 395-415W

108 Pieces | HALF-CELL | P-Type

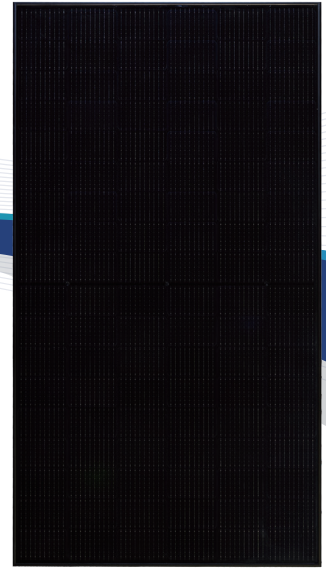

**21.3%**  
Max. Efficiency  
**P-Type**  
Single Glass



### High Conversion Efficiency

Module efficiency up to 21.3% achieved through advanced cell technology and manufacturing process



### Excellent weak light performance

More power output in weak light condition, such as cloudy days, morning and sunset



### Extended mechanical performance

Module certified to withstand extreme wind(2400 Pa) and snow loads(5400 Pa)




### Quality Guarantee

High module quality ensures long-term reliability



IEC61215 / IEC61730 / UL61730  
IEC61701 / IEC62716 / IEC60068  
ISO9001 / ISO14001/ ISO45001

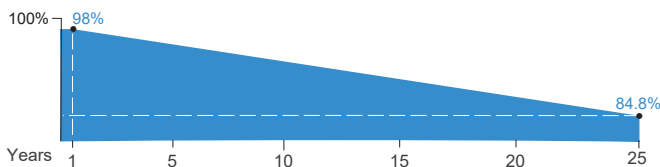

Runergy P-Type Single Glass Product Performance Warranty

warranty for materials and workmanship



warranty for extra linear power output




## Mechanical Parameters

Solar Cell	Mono PERC 182 mm
No. of Cells	108(6 × 18)
Dimensions	1722 × 1134 × 30mm
Weight	20.5kg
Junction Box	IP68 rated (3 bypass diodes)
Output Cable	4mm <sup>2</sup> (IEC), 12 AWG(UL) ±1200mm or customized
Connector	RY01 or similar
Front Cover	3.2mm AR Tempered glass
Container	36 pcs/Pallet, 936 pcs/40' HC

## Operating Parameters

Max. System Voltage	DC 1500V(IEC)
Operating Temperature	-40°C ~ +85°C
Max. Fuse Rating	25A
Frontside Max. Loading	5400Pa
Backside Max. Loading	2400Pa
Fire Resistance	IEC Class C

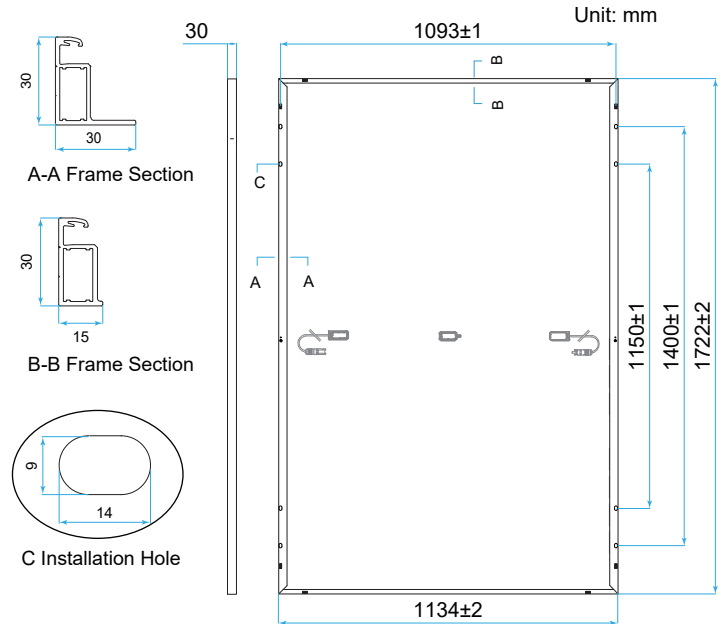

## Electrical Characteristics - STC

Irradiance 1000 W/m<sup>2</sup>, ambient temperature 25 °C, AM1.5.

	415	410	405	400	395
Maximum Power at STC (Pmax/W)					
Power Tolerance (W)			0 ~ +5		
Optimum Operating Voltage (Vmp/V)	31.61	31.45	31.21	31.01	30.84
Optimum Operating Current (Imp/A)	13.13	13.04	12.98	12.90	12.81
Open Circuit Voltage (Voc/V)	37.45	37.32	37.23	37.07	36.98
Short Circuit Current (Isc/A)	14.02	13.95	13.87	13.79	13.70
Module Efficiency	21.3%	21.0%	20.7%	20.5%	20.2%

## Electrical Characteristics - NMOT

Irradiance 800 W/m<sup>2</sup>, ambient temperature 20 °C, AM1.5, wind speed 1 m/s.

Maximum Power at NMOT (Pmax/W)	313.9	310.2	306.4	302.5	298.8
Optimum Operating Voltage (Vmp/V)	29.98	29.82	29.60	29.41	29.25
Optimum Operating Current (Imp/A)	10.47	10.40	10.35	10.29	10.22
Open Circuit Voltage (Voc/V)	35.51	35.39	35.31	35.15	35.07
Short Circuit Current (Isc/A)	11.31	11.25	11.19	11.13	11.05

## Temperature Characteristics

Nominal Module Operating Temperature	42 ± 2 °C
Nominal Cell Operating Temperature	45 ± 2 °C
Temperature Coefficient of Pmax	-0.35%/°C
Temperature Coefficient of Voc	-0.27%/°C
Temperature Coefficient of Isc	0.050%/°C

## Warranty

Product Workmanship Warranty	15 Years
Linear Power Output Warranty	25 Years
First Year Degradation	2%
Annual Power Degradation	0.55%

