

RUNERGY

TIER 1 HY-WH132P8 495-515W

21.7% Max. Efficiency **P-Type** Single Glass **132 Pieces** Half-Cell



High Conversion Efficiency

Module efficiency up to 21.7% achieved through advanced cell technology and manufacturing process



Excellent weak light performance

More power output in weak light condition, such as cloudy days, morning and sunset




Extended mechanical performance

Module certified to withstand extreme wind(2400 Pa) and snow loads(5400 Pa)



Quality Guarantee

High module quality ensures long-term reliability

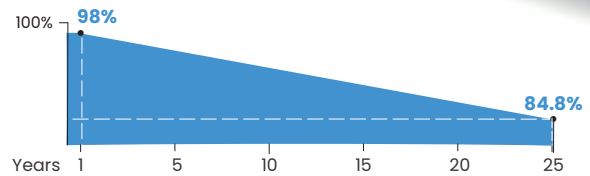

Runergy P-Type Single Glass Product Performance Warranty

- **12 Years** warranty for materials and workmanship
- **25 Years** warranty for extra linear power output
- 1st year < **2%**, annual degradation < **0.55%**

IEC61215 / IEC61730 / UL61730 / IEC61701 / IEC62716 / IEC60068 / ISO9001 / ISO14001/ ISO45001



www.runergy.com
sales-inform@runergy.com


Unit: mm(inch)

Mechanical Parameters

Solar Cell	Mono PERC 182mm
No. of Cells	132 (6 × 22)
Dimensions	2094 × 1134 × 35mm(82.44 × 44.65 × 1.38in)
Weight	26.3kg(57.98 lbs)
Junction Box	IP68 rated (3 bypass diodes)
Output Cable	4mm ² (IEC), 12 AWG(UL) +400/-200mm(+15.75/-7.87in.) or customized
Connector	RY01 or similar
Front Cover	3.2mm (0.13in.) AR Tempered glass
Container	31 pcs/Pallet, 682 pcs/40' HQ

Operating Parameters

Max. System Voltage	DC 1500V (IEC/UL)
Operating Temperature	-40°C ~ +85°C(-40°F ~ +185°F)
Max. Fuse Rating	25A
Frontside Max. Loading	5400Pa(112lb/ft ²)
Backside Max. Loading	2400Pa(50lb/ft ²)
Fire Resistance	IEC Class C

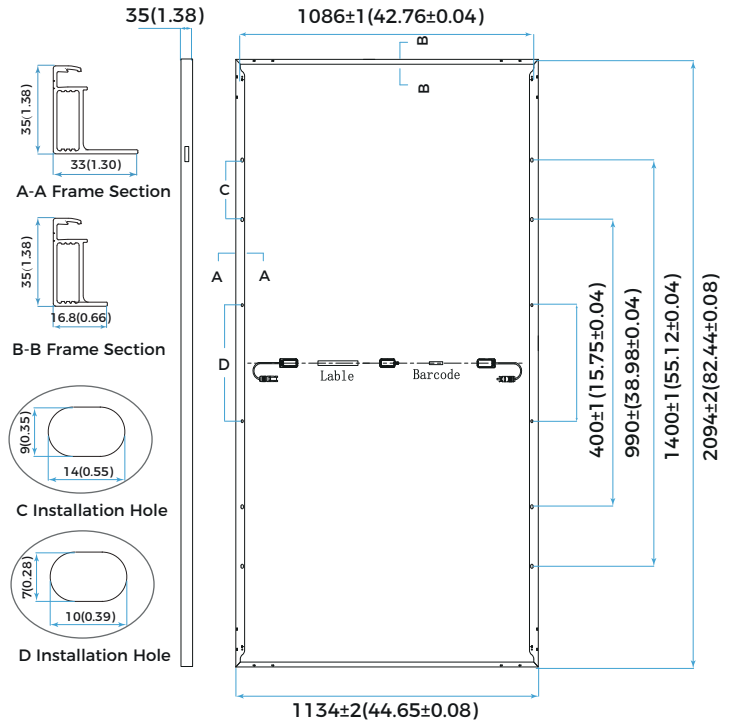

Electrical Characteristics - STC

Irradiance 1000 W/m², cell temperature 25 °C, AM1.5, Test uncertainty for Pmax: ±3%

	515	510	505	500	495
Maximum Power at STC (Pmax/W)	515	510	505	500	495
Power Tolerance (W)	0 ~ +5				
Optimum Operating Voltage (Vmp/V)	38.90	38.70	38.53	38.35	38.17
Optimum Operating Current (Imp/A)	13.24	13.18	13.11	13.04	12.97
Open Circuit Voltage (Voc/V)	45.99	45.84	45.72	45.59	45.46
Short Circuit Current (Isc/A)	14.13	14.07	14.00	13.93	13.86
Module Efficiency	21.7%	21.5%	21.3%	21.1%	20.8%

Electrical Characteristics - NMOT

Irradiance 800 W/m², ambient temperature 20 °C, AM1.5, wind speed 1 m/s.

Maximum Power at NMOT (Pmax/W)	389.5	385.8	382.0	378.2	374.4
Optimum Operating Voltage (Vmp/V)	36.89	36.70	36.54	36.37	36.20
Optimum Operating Current (Imp/A)	10.56	10.51	10.46	10.40	10.34
Open Circuit Voltage (Voc/V)	43.61	43.47	43.36	43.23	43.11
Short Circuit Current (Isc/A)	10.56	10.51	10.46	10.40	10.34

Warranty

Product Workmanship Warranty	12 Years
Linear Power Output Warranty	25 Years
First Year Degradation	2%
Annual Power Degradation	0.55%

Temperature Characteristics

Nominal Module Operating Temperature	42 ± 2 °C
Nominal Cell Operating Temperature	45 ± 2 °C
Temperature Coefficient of Pmax	-0.35%/°C
Temperature Coefficient of Voc	-0.26%/°C
Temperature Coefficient of Isc	0.048%/°C

